

Pulley Quotation Worksheet


For selection assistance please consult "PCI PULLEY SELECTION GUIDE" or call PCI Customer Service at 989.358.6149.



COMPANY NAME / BRANCH NO. _____ COMPANY PHONE NO. _____

YOUR NAME _____ EMAIL ADDRESS _____

QUANTITY _____ ACCESSORIES REQUIRED: TAKE-UP FRAME PART# _____ BEARING PART# _____ BORE SIZE _____

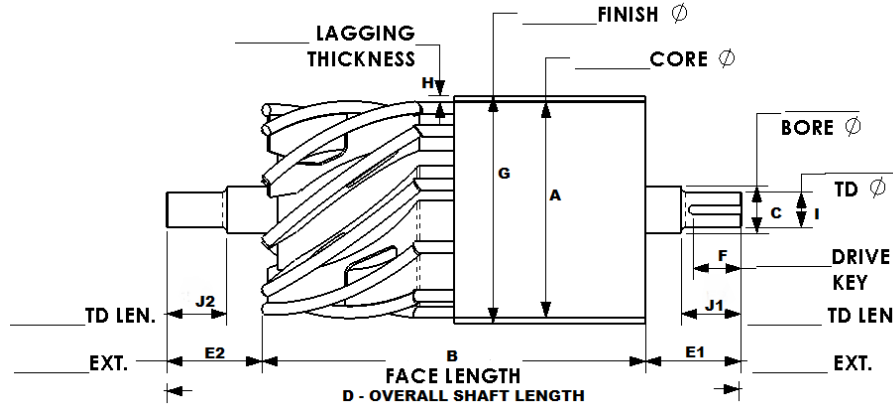

<p>PULLEY POSITION: <input type="checkbox"/> Drive <input type="checkbox"/> Tail <input type="checkbox"/> Snub <input type="checkbox"/> Take-Up <input type="checkbox"/> Bend</p> <p>PULLEY PROFILE: <input type="checkbox"/> Flat Face <input type="checkbox"/> Crowned Face <input type="checkbox"/> V-Groove: _____ Section Special V: _____ X _____ X _____</p> <p>PULLEY CONFIGURATION: (choose one)</p> <p>Drum-Package Handling: <input type="checkbox"/> FC Series <input type="checkbox"/> MC Series</p> <p>Drum- Bulk Handling: <input type="checkbox"/> Standard Duty <input type="checkbox"/> Heavy Duty <input type="checkbox"/> Mine Duty</p> <p>WING (traditional): <input type="checkbox"/> Standard Duty <input type="checkbox"/> Heavy Duty <input type="checkbox"/> Mine Duty <input type="checkbox"/> Other _____</p> <p>ERADICATOR®: <input type="checkbox"/> Standard Duty <input type="checkbox"/> Heavy Duty <input type="checkbox"/> Mine Duty</p> <p>ERADICATOR®-MAX: <input type="checkbox"/> Standard Duty <input type="checkbox"/> Heavy Duty <input type="checkbox"/> Mine Duty</p> <p>ERADICATOR®D2®: <input type="checkbox"/> Standard Duty <input type="checkbox"/> Heavy Duty <input type="checkbox"/> Mine Duty Discharge: <input type="checkbox"/> Right <input type="checkbox"/> Left</p> <p>ICE ERADICATOR®: <input type="checkbox"/> Standard Duty <input type="checkbox"/> Heavy Duty <input type="checkbox"/> Mine Duty</p> <p>STAINLESS: <input type="checkbox"/> Sanitary Class <input type="checkbox"/> Super Clean <input type="checkbox"/> Easy Clean <input type="checkbox"/> Extra Value</p> <p>HUB TYPE: (choose one) Type C Internal bearings not available on Ice-Eradicator®</p> <p>TYPE A: <input type="checkbox"/> Plain Bore <input type="checkbox"/> With Welded Shaft</p> <p>TYPE B: <input type="checkbox"/> Keyed Hub with Set Screws</p> <p>TYPE C: <input type="checkbox"/> "ER" Style Internal Bearings <input type="checkbox"/> Dead Shaft</p> <p>CH&B: <input type="checkbox"/> XT® <input type="checkbox"/> QD® <input type="checkbox"/> TAPERLOCK® <input type="checkbox"/> XT® INTEGRAL ENDS Preferred Hub Size _____</p> <p>KLD: <input type="checkbox"/> Keyless Locking Devices Brand Preference _____</p>	<p>A. Core Diameter _____ Pulley Core Thickness _____</p> <p>B. Face Length _____</p> <p>C. Main Shaft/Bore Dia. _____</p> <p>D. OA Shaft Length _____</p> <p>E1. Extension Length _____</p> <p>E2. Extension Length _____</p> <p>F. Keyway Length _____</p> <p>G. Finish Diameter _____</p> <p>H. Lagging Thickness _____</p> <p>I. Turndown Dia. _____ <input type="checkbox"/> One End <input type="checkbox"/> Both Ends</p> <p>J1. Turndown Length _____</p> <p>J2. Turndown Length _____</p> <p>Bearing Centers _____</p>
---	---

LAGGING: Durometer _____ Thickness _____ Color Preference _____

TYPE: S.B.R. Carboxylated Nitrile E.P.D.M. Neoprene Nitrile Urethane S.W.R.T. Weld-On Ceramic Food Grade

GROOVING: HERRINGBONE CHEVRON DIAMOND GROOVE DIRECTION: Clockwise Counterclockwise

KNURLING – Teeth Per Inch (TPI) ON CONTACT SURFACE Fine (25 TPI) Medium (16 TPI) Coarse (10 TPI)

ICE ERADICATOR® PARAMETERS: USA Canada Other (Specify) _____

OPERATING TIME: Hours/day _____ Days/week _____ Weeks/year _____ **BELT SPEED (ft/min):** _____ **Lowest Temp:** _____ °F _____ °C



(989)358-6149

www.pcimfg.com